

## LKRA-VPA 126K-FI

Light duty swivel caster with bolt hole fitting, with brake system 'stop-fix', wheel with solid rubber tires, with synthetic rim

EAN 4047526225162

ID 225169

Customs tariff number 87169090



### Rig: LKRA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: VPA series

- tire: high-quality solid rubber, hardness 80 Shore A, color gray, non-marking, non-staining
- rim: high-quality nylon 6 or polypropylene in the electrically conductive version "-EL", impact resistant, color black

### Other features:

- high chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C

### Technical data:

Wheel Ø (D)	⌀	125 mm
Wheel width	⊥	32 mm
Load capacity at 3 km/h	⬆	120 kg
Load capacity (static)	⬆	300 kg
Bearing type	⦿	ball bearing
Total height (H)	⊕	158 mm
Plate Ø	⌀	57 mm
Bolt hole	⦿	13 mm
Offset (F)	⦿	40 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tire hardness		80 Shore A
Unit weight	⚖	0.9 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×



### Tread and tire hardness

■ ■ ■ ■ □ 80 Shore A

### Rolling resistance



■ ■ ■ ■ □ good

### Wear resistance

■ □ □ □ □ sufficient

### Operating noise / floor surface preservation

■ ■ ■ ■ □ very good

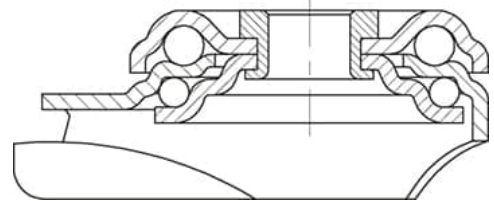

## Product references



**Corresponding rigid caster BKRA-VPA 126K**



**Corresponding swivel caster LKRA-VPA 126K**



**Wheel used VPA 126/8K**