

GEVA 405/5

Heavy duty hub fitting wheel, with elastic solid rubber tire, with cast iron wheel center

EAN 4047526113827

ID 754443

Customs tariff number 87169090



tire:

- high-quality elastic solid rubber in smooth rolling quality, steel-wire reinforced, hardness 65 Shore A
- very good operational comfort
- very good floor preservation, low-noise operation
- low rolling resistance
- color black

Wheel center:

- rugged gray cast iron
- center piece with a central hole and fitting holes
- fitting holes with domed anchor recesses
- lacquered, color anthracite

Other features:

- fitted using domed anchor nuts and bolts in accordance with DIN 74361
- chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °F to +175 °F, temporarily up to +210 °F, reduced load capacity over +140 °F
- wheel centre is approximately 4 mm wider than the specified wheel width

Technical data:

Wheel Ø (D)	⌀	405 mm
Wheel width	⊥	130 mm
Load capacity at 4 km/h	⚖	1,800 kg
Load capacity at 6 km/h	⚖	1,500 kg
Load capacity at 10 km/h	⚖	1,200 kg
Load capacity at 16 km/h	⚖	900 kg
Load capacity (static)	⚖	4,500 kg
Bearing type	⦿	hub fitting
Number of fixing holes	⊗	5
Fixing hole Ø		18.5 mm
Central hole Ø (d)	⦿	110 mm
PCD (d1)	⊗	145 mm
Temperature resistance min		-30 °C
Temperature resistance max		80 °C
Tread and tire hardness		65 Shore A
Unit weight	⚖	28.7 kg
Non-marking		×
Non-staining		×
Antistatic	⚡	×
ProductDetail.TechnicalData.Esd		×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×



Tread and tire hardness

■ ■ ■ ■ ■ 65 Shore A

Rolling resistance


■ ■ ■ ■ ■ very good

Wear resistance

■ ■ ■ ■ ■ satisfactory

Operating noise / floor surface preservation

■ ■ ■ ■ ■ very good

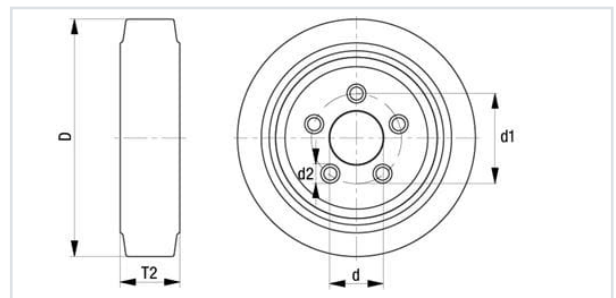

Tread hydrolysis-resistant	×
Suitable for autoclaves	×