

LKRA-VPA 126G-11-FA-ER14

Light duty swivel caster with bolt hole fitting, with synthetic expander, wheel with solid rubber tires, with synthetic rim, with steel thread guard

EAN 4047526135744

ID 848367

Customs tariff number 87169090



rig: LKRA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: VPA series

- tire: high-quality solid rubber, hardness 80 Shore A, color gray, non-marking, non-staining
- rim: high-quality nylon 6 or polypropylene in the electrically conductive version "-EL", impact resistant, color black

Other features:

- high chemical resistance to many aggressive substances, except oils
- operating temperature: -20 °C to +60 °C, reduced load capacity over +30 °C

Technical data:

Wheel Ø (D)	☉	125 mm
Wheel width	⊥	32 mm
Load capacity at 3 km/h	⚖	120 kg
Load capacity (static)	⚖	300 kg
Bearing type	⊙	plain bore
Total height (H)	⊕	161 mm
Internal tube dimension	👁	30–35 mm
Offset (F)	⌘	40 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tire hardness		80 Shore A
Unit weight	⚖	0.9 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tire hardness

■ ■ ■ ■ □ 80 Shore A

Rolling resistance



■ ■ ■ ■ □ good

Wear resistance

■ □ □ □ □ sufficient

Operating noise / floor surface preservation

■ ■ ■ ■ □ very good

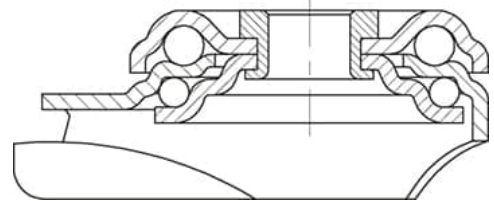

Product references



Corresponding standard locking LKRA-VPA 126G-11-FI-FA-ER14



Wheel used VPA 126/12G