

LKRA-PATH 126KF-11-ELS

Light duty swivel caster with bolt hole fitting, wheel with thermoplastic polyurethane tread, with nylon wheel center, with synthetic thread guard, large, electrically conductive, N on-marking

EAN 4047526144869

ID 848896

Customs tariff number 87169090



rig: LKRA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: PATH series

- tread: high-quality thermoplastic polyurethane (TPU), hardness 94 Shore A, color dark gray, non-marking, non-staining
- wheel center: high-quality nylon 6, impact resistant, color silver gray

Other features:

- with synthetic thread guard, large
- very high chemical resistance to many aggressive substances
- operating temperature: -5 °F to +160 °F, temporarily up to +195 °F, reduced load capacity over +95 °F
- electrical conductivity (ohmic resistance) $\leq 10^4 \Omega$

Technical data:

Wheel Ø (D)	🌀	125 mm
Wheel width	⊥	32 mm
Load capacity at 3 km/h	⚖	120 kg
Load capacity (static)	⚖	300 kg
Bearing type	⦿	ball bearing (C)
Total height (H)	📏	158 mm
Plate Ø	🌀	57 mm
Bolt hole	🔩	11 mm
Offset (F)	📏	40 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tire hardness		94 Shore A
Unit weight	📏	0.7 kg
Non-marking		✓
Non-staining		✓
Antistatic	🌀	✗
Electrically conductive	🌀	✓
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tire hardness

■ ■ ■ ■ ■ 94 Shore A

Rolling resistance



■ ■ ■ ■ ■ very good

Wear resistance

■ ■ ■ ■ ■ very good

Operating noise / floor surface preservation

■ ■ ■ ■ ■ good

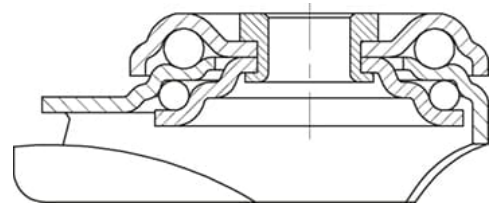

Product references



Corresponding standard locking LKRA-PATH 126KF-11-FI-ELS



Wheel used PATH 126/8KF-ELS