

## LKRA-POA 125G-11-FI-EV15

Light duty swivel caster with bolt hole fitting, with synthetic expander, with brake system 'stop-fix', nylon wheel

EAN 4047526147839

ID 849042

Customs tariff number 87169090



### rig: LKRA series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: POA series

- high-quality nylon 6, impact resistant, hardness 70 Shore D, color black

### Other features:

- high chemical resistance to many aggressive substances
- operating temperature: -25 °C to +80 °C, reduced load capacity over +35 °C

### Technical data:

Wheel Ø (D)	☉	125 mm
Wheel width	⊥	32 mm
Load capacity at 3 km/h	⚖	120 kg
Load capacity (static)	⚖	300 kg
Bearing type	⊙	plain bore
Total height (H)	⊕	161 mm
Internal tube dimension	⦶	29–32 mm
Offset (F)	⦶	40 mm
Temperature resistance min		-25 °C
Temperature resistance max		80 °C
Tread and tire hardness		70 Shore D
Unit weight	⚖	0.8 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



### Tread and tire hardness

■■■■■ 70 Shore D

### Rolling resistance



■■■■■ excellent

### Wear resistance

■■■■■ good

### Operating noise / floor surface preservation

■■■■■ satisfactory

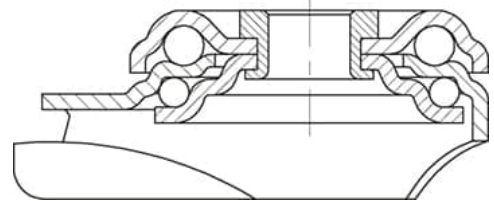

## Product references



**Corresponding swivel caster LKRA-POA 125G-11-EV15**



**Wheel used POA 125/12G**