

LKR-POEV 125KAD-FA

Pressed steel swivel caster, heavy duty design, with bolt hole, heavy duty wheel, with "Blickle EasyRoll" elastic solid rubber tires, with nylon wheel center, with synthetic thread guard, small, with additional ball bearing seals, with steel thread guard

EAN 4047526181208

ID 851545

Customs tariff number 87169090



rig: LKR series

- strong pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: POEV series

- tire: high-quality elastic solid rubber "Blickle EasyRoll" in smooth rolling quality, hardness 65 Shore A, color black
- wheel center: high-quality nylon 6, impact resistant, color black

Other features:

- small thread guard, with additional, ball bearing seal
- high chemical resistance to many aggressive substances, except oils
- operating temperature: -5 °F to +175 °F, temporarily up to +210 °F, reduced load capacity over +95 °F

Technical data:

Wheel Ø (D)	☉	125 mm
Wheel width	⊥	37 mm
Load capacity at 4 km/h	⬇	250 kg
Load capacity (static)	⬇	625 kg
Bearing type	⊙	ball bearing (C)
Total height (H)	⊘	155 mm
Plate Ø	⊘	88 mm
Bolt hole	⦿	13 mm
Offset (F)	⦿	48 mm
Temperature resistance min		-20 °C
Temperature resistance max		80 °C
Tread and tire hardness		65 Shore A
Unit weight	⚖	1.3 kg
Non-marking		×
Non-staining		×
Antistatic	⚡	×
Electrically conductive	⚡	×
Corrosion-resistant		×
Heat-resistant	🔥	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×



Tread and tire hardness

■■■■■ 65 Shore A

Rolling resistance



■■■■■ very good

Wear resistance

■■■■■ good

Operating noise / floor surface preservation

■■■■■ very good

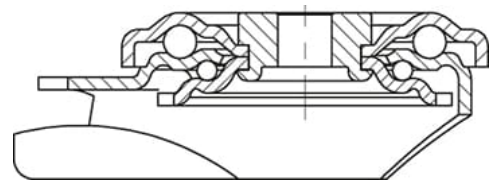

Product references



Corresponding standard locking LKR-POEV 125KAD-FI-FA



Wheel used POEV 125/10KAD