

## LK-PATH 125KF-3-ELS

**Pressed steel swivel caster, heavy duty design, wheel with thermoplastic polyurethane tread, with nylon wheel center, with synthetic thread guard, large, electrically conductive, N on-marking**

EAN 4047526189815

ID 852261

Customs tariff number 87169090



### rig: LK series

- strong pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 125x50 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

### Wheel: PATH series

- tread: high-quality thermoplastic polyurethane (TPU), hardness 94 Shore A, color dark gray, non-marking, non-staining
- wheel center: high-quality nylon 6, impact resistant, color silver gray

### Other features:

- with synthetic thread guard, large
- very high chemical resistance to many aggressive substances
- operating temperature: -5 °F to +160 °F, temporarily up to +195 °F, reduced load capacity over +95 °F
- electrical conductivity (ohmic resistance)  $\leq 10^4 \Omega$

### Technical data:

Wheel Ø (D)	⌀	125 mm
Wheel width	⊥	32 mm
Load capacity at 4 km/h	⬇	160 kg
Load capacity (static)	⬇	400 kg
Bearing type	⊙	ball bearing (C)
Total height (H)	⊥	155 mm
Plate size	⊞	140 x 110 mm
Bolt hole spacing	⊞	105 x 75–80 mm
Bolt hole Ø	⌀	11 mm
Offset (F)	⌀	48 mm
Temperature resistance min		-20 °C
Temperature resistance max		70 °C
Tread and tire hardness		94 Shore A
Unit weight	⚖	1.3 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	✗
Electrically conductive	⚡	✓
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗



### Tread and tire hardness

■ ■ ■ ■ ■ 94 Shore A

### Rolling resistance



■ ■ ■ ■ ■ very good

### Wear resistance

■ ■ ■ ■ ■ very good

### Operating noise / floor surface preservation

■ ■ ■ ■ ■ good

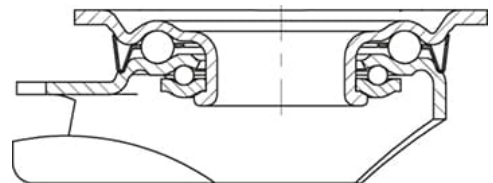

Suitable for autoclaves	×
Suitable for machine washing	×

## Product references



**Corresponding standard locking LK-PATH 125KF-3-FI-ELS**



**Corresponding rigid caster BK-PATH 125KF-3-ELS**



**Wheel used PATH 125/10KF-ELS**