

LKRXA-PATH 101G-11-EXR13

Stainless steel light duty swivel caster with bolt hole, with synthetic expander, wheel with thermoplastic polyurethane tread, with nylon wheel center

EAN 4047526206000

ID 853436

Customs tariff number 87169090



rig: LKRXA series

- high-quality chromium-nickel steel (1.4301/AISI 304), stainless steel, vibration-ground finishing
- all parts including axle material are corrosion-resistant
- double ball bearing in the swivel head
- strong central kingpin
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: PATH series

- tread: high-quality thermoplastic polyurethane (TPU), hardness 94 Shore A, color dark gray, non-marking, non-staining
- wheel center: high-quality nylon 6, impact resistant, color silver gray

Other features:

- very high chemical resistance to many aggressive substances
- operating temperature: -15 °F to +160 °F, temporarily up to +195 °F, reduced load capacity over +95 °F

Technical data:

Wheel Ø (D)	☉	100 mm
Wheel width	⊥	32 mm
Load capacity at 3 km/h	⬆	120 kg
Load capacity (static)	⬆	300 kg
Bearing type	⊙	plain bore
Total height (H)	⊕	136 mm
Internal tube dimension	👁	25–30 mm
Offset (F)	⊖	40 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tire hardness		94 Shore A
Unit weight	⚖	0.6 kg
Non-marking		✓
Non-staining		✓
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✓
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗
Suitable for machine washing		✗



Tread and tire hardness

■ ■ ■ ■ ■ □ 94 Shore A

Rolling resistance



■ ■ ■ ■ ■ □ very good

Wear resistance

■ ■ ■ ■ ■ □ very good

Operating noise / floor surface preservation

■ ■ ■ ■ □ □ good

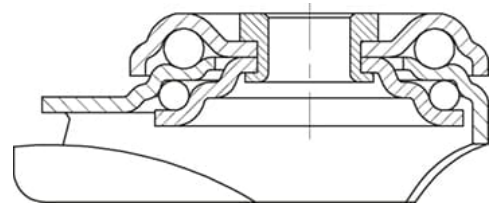

Product references



Corresponding standard locking LKRXA-PATH 101G-11-FI-EXR13



Wheel used PATH 101/12G