

L-RD 202R-FI-FA-FS

Pressed steel swivel caster, medium duty design, with top plate fitting, with brake system 'stop-fix', and steel foot guard, wheel with "Blickle Comfort" two-component solid rubber tires, with pressed steel rim, with steel thread guard

EAN 4047526394066

ID 938458

Customs tariff number 87169090



rig: L series

- pressed steel, zinc-plated, blue-passivated, Cr6-free
- double ball bearing in the swivel head
- strong central kingpin (from wheel Ø 150 mm)
- swivel head seal
- minimum swivel head play and smooth rolling characteristic and increased service life due to the special dynamic Blickle riveting process

Wheel: RD series

- tire: two-component solid rubber "Blickle Comfort", hardness 65 Shore A, color black
- rim: pressed steel, strong rim structure with tubular steel hub, bolted or pressed, zinc-plated, blue-passivated, Cr6-free

Other features:

- chemical resistance to many aggressive substances, except oils
- operating temperature: -25 °C to +80 °C, reduced load capacity over +60 °C

Technical data:

Wheel Ø (D)	☉	200 mm
Wheel width	⊥	50 mm
Load capacity at 4 km/h	⚖	350 kg
Load capacity (static)	⚖	875 kg
Bearing type	⊙	roller bearing
Total height (H)	⊥	235 mm
Plate size	☐	140 x 110 mm
Bolt hole spacing	⚓	105 x 75–80 mm
Bolt hole Ø	⌀	11 mm
Offset (F)	⊥	63 mm
Temperature resistance min		-25 °C
Temperature resistance max		70 °C
Tread and tire hardness		65 Shore A
Unit weight	⚖	4.6 kg
Non-marking	✗	
Non-staining	✗	
Antistatic	⚡	✗
Electrically conductive	⚡	✗
Corrosion-resistant		✗
Heat-resistant	🔥	✗
Tread hydrolysis-resistant		✗
Suitable for autoclaves		✗



Tread and tire hardness

■ ■ ■ ■ ■ 65 Shore A

Rolling resistance



■ ■ ■ ■ ■ good

Wear resistance

■ ■ ■ ■ ■ satisfactory

Operating noise / floor surface preservation

■ ■ ■ ■ ■ very good

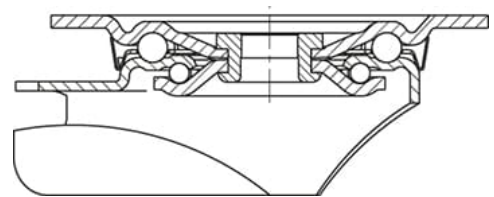

Product references



Corresponding rigid caster B-RD 202R-FA-FS



Corresponding swivel caster L-RD 202R-FA-FS



Wheel used RD 202/20R