

LD-POEV 60KF

Twin compact swivel caster, heavy duty wheel, with "Blickle EasyRoll" elastic solid rubber tires, with nylon wheel center, with synthetic thread guard, large

EAN 4047526368661

ID 941843

Customs tariff number 83022000



rig: LD series

- swivel rig: zinc die-cast
- high-quality ball bearing in the swivel head
- zinc-plated steel threaded pin

Wheel: POEV series

- tire: high-quality elastic solid rubber "Blickle EasyRoll" in smooth rolling quality, hardness 65 Shore A, color black
- wheel center: high-quality nylon 6, impact resistant, color black

Other features:

- with synthetic thread guard, large
- high chemical resistance to many aggressive substances, except oils
- operating temperature: -5 °F to +175 °F, temporarily up to +210 °F, reduced load capacity over +95 °F

Technical data:

Wheel Ø (D)	⌀	60 mm
Wheel width	⊥	34 mm
Number of wheels		2
Total castor width	⌀	105 mm
Load capacity at 3 km/h	⬇	240 kg
Load capacity at 4 km/h	⬇	240 kg
Bearing type	⊙	ball bearing (CC)
Total height (H)	⌀	65 mm
Pin length	⊥	20 mm
Thread		M16
Offset (F)	⌀	39 mm
Temperature resistance min		-20 °C
Temperature resistance max		60 °C
Tread and tire hardness		65 Shore A
Unit weight	⬆	0.6 kg
Non-marking		×
Non-staining		×
Antistatic	Ⓢ	×
Electrically conductive	Ⓢ	×
Corrosion-resistant		×
Heat-resistant	Ⓢ	×
Tread hydrolysis-resistant		×
Suitable for autoclaves		×
Suitable for machine washing		×



Tread and tire hardness

■ ■ ■ ■ ■ 65 Shore A

Rolling resistance


■ ■ ■ ■ ■ very good

Wear resistance

■ ■ ■ ■ ■ good

Operating noise / floor surface preservation

■ ■ ■ ■ ■ very good

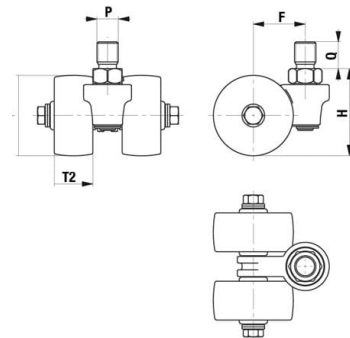

Product references



Wheel used POEV 60/8KF